



WELLE

CUSTOM ELECTRICAL INSULATION

MEDICAL PTFE (TEFLON) TUBE

Technical data sheet - PTFE tubing for medical devices

SINCE 2017

ISO 9001

OEM / ODM

Well Electric - WELLELE

No. 196 Yingchun Road, Suzhou, Jiangsu, China

Tel +86 512 6708 1529 - sale@wellele.com - www.wellele.com

医疗级铁氟龙管 Medical Grade Teflon Tube

铁氟龙软管(PTFE)也称聚四氟乙烯软管是高品质进口卫生级塑料软管。符合FDA认证。
Teflon hose (PTFE) also called PTFE hose is of high quality imported plastic hose health level. Comply with FDA certification.

PTFE和FEP是氟塑料材料一族的一部分，这些材料以耐受几乎全部化学品和溶液为特点。他们具有到-200℃到+260℃作业温度范围。他们具有低摩擦系数，在低温时仍保持弹性。抗电性非常高，且它的绝缘性使它成为绝缘体的良好选择。这些材料是自然不可燃烧的，且无毒，抗紫外线。因为它们的摩擦系数低，很难在这些材料上使用粘合剂，它们耐焊接，除非在高温高压下操作。PTFE和FEP可以通过高压灭菌、伽玛射线乙撑氧或干热进行消毒。

PTFE and FEP is part of the fluorine plastic material gens, almost all of these materials to tolerance chemicals and solution. They have to - 200℃to + 200℃Operating temperature range.They have low friction coefficient, at low temperature remain elastic. The electric resistance is very high, and its insulation makes it a good option for insulator. The material is natural not to burn, and non - toxic, resistance to ultraviolet light. Because of their low coefficient of friction, it is difficult to use glue on the material, resistance welding, Unless the operation under high temperature and high pressure. PTFE and FEP by high pressure sterilization, the blessed rays ethylene oxide or dry heat sterilization.

产品：高纯度特氟龙软管
全称：聚四氟乙烯软管
产品应用：用于需要稳定的无毒材料的制药和工业用途中，在广泛的温度单位内耐受大部分化学溶剂；摩擦性环境安装
特点：质量轻，半透明；不燃烧，纯净，低摩擦，非常广泛的作业温度范围；无黏性；与大部分化学品在一起非常稳定
温度范围：-200° C to +280° C (-328° F to +536° F)
消毒：干热；伽玛射线；高压灭菌；乙撑氧
硬度：64 Shore D +/-6
延长断裂点：200% - 500%
认证：FDA

Products: high purity, teflon hose
Full name: ptfe hose
Product application: used for stable non-toxic materials, pharmaceutical and industrial purposes, most chemical solvents in a wide range of temperature unit tolerance; Grinding environment installation
Features: the quality is light, translucent; Don't burn, pure, low friction, a very wide range of operating temperature range; There is no paste. With most of the chemicals is very stable
Temperature range: 200 °C to + 280 °C (328 °F to + 536 °F)
Disinfection: dry; Ng a ray; High pressure sterilization; Ethylene oxide
Hardness: 64 Shore D + / - 6
Extend the breaking point: 200% 500%
Authentication: the FDA

如有需要，任何尺寸我司都可为客户订制。
If necessary, any size we can custom-made for the customer.


其他特殊产品加工
Other Special Products Processing



特殊铁氟龙管




扩口铁氟龙管

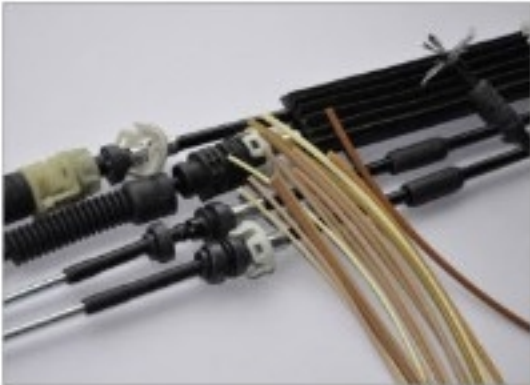

拉索管




波纹管编织管

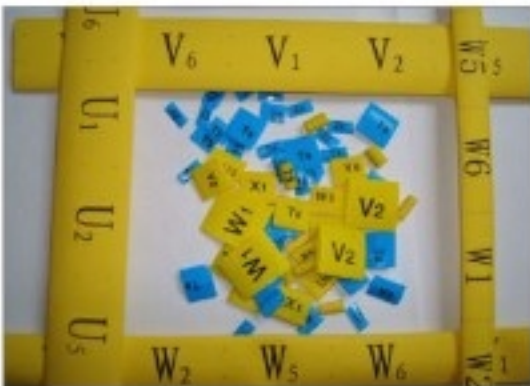

特殊印字热缩管



铁氟龙毛细管

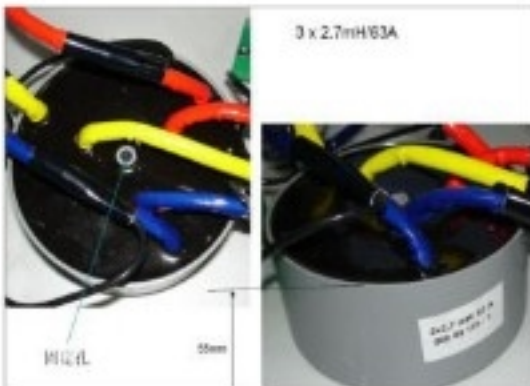

玻纤管



铁氟龙多腔管



PPS铁氟龙管



铁氟龙采样管



铁氟龙防腐伴热管



连续长铁氟龙管